



## USER GUIDE DIRECTIONS FOR USE



**STROLLER AND MTB-TRAILER KOLOFOGO**  
**WWW.KOLOFOGO.CZ**



The stroller/trailer KOLOFOGO is manufactured by:

RedFleck spol. s r. o.  
Tř. Svobody 956/31  
779 00 Olomouc  
Czech Republic  
e-mail: [info@redfleck.cz](mailto:info@redfleck.cz)  
tel.: +420 724 014 416

## HOW TO FOLD THE TRAILER/STROLLER

It's actually easy - you shall just tighten few screws. In this user guide we've used mainly pictures because we think that they are often more illustrative than a tons of text. We've got just one small appeal to you - control and tighten all the screws before each trip. If you'd have any questions, be sure that you can either write to us: [info@redfleck.cz](mailto:info@redfleck.cz) or call Pavel +420 724 014 416.

Thank you for purchasing KoloFogo. We hope you'll be satisfied.

1. The stroller will come to you almost completed. The only part of it's frame you'll have to assemble is the handlebar. Start with it - just follow the pictures.
2. Then assemble the cab. Just raise the frame and screw together the divided parts of the construction. Use the two long screws with plastic heads.





3. Pull the upholstery over the frame and click the buttons.



4. Raise the handlebar and screw it to the frame. Tighten the screws, please.



5. Lean the stroller forward - with the handlebar leaned on the ground. You'll then have better access to the swinging fork.

Screw the absorber to the frame, then - using the quick-release screw - to the swinging fork. The absorber is preset to 40-50 PSI (for the weight up to 35 kg), you don't have to alter the pressure.



6. Put the big wheel on - first put the disc on the wheel between the calipers of the brake. Then press the button on the axle, push it in the swinging fork and in the nave of the wheel.



After that, please control if the small balls at the opposite end of the axle have jumped out. Control that always, please, before each trip.





7. Lean the stroller on the ground and put the smaller wheels on. Use the same trick as by the big wheel - just press the button on the axle and push it into the tube. Now you can go for a walk.



## HOW TO ATTACH THE TRAILER TO THE BIKE

**WARNING:** When attaching the trailer to the bike or when detaching it, the trailer **MUST** be empty. Please load the child and the baggage into it after you attach or detach the trailer.

8. Fasten the flag onto the frame - use the screw/nut and the plastic roll on the frame..



9. Make sure that the handlebar is fully tucked into the tubes - tighten the clamps and then use the plastic safety pins to secure the handlebar.



10. Put the adapter on the seatpost - as down to the frame as possible and with the "collar" to the back. Tighten the screws fast so the adapter won't roll round.



11. Attach the drag bar to the adapter - use the long screw enclosed and the black plastic quick-release lever. Tighten up the lever, then also the screw (with the spanner).





12. Take the second adapter and put him on the handlebar. When there, use the screw and the nut to fasten it to the handlebar.



13. Unlock the axle with the two small wheels so it will just hang down (it will now work as a kickstand). Insert the adapter tightened to the handlebar into the drag bar and tighten it together with the quick-release screw.



14. Take the axle with the two small wheels and click it up/forward to the frame. Now you can go...

When detaching the trailer, start with loosening up the axle so it will again work as a kickstand.

Then you'll loose the quick-release screw on the adapter tightened to the handlebar. Take the handlebar with one hand, raise it a little bit, then with the second hand loose the drag bar.



## WITH OR WITHOUT THE WHEELS

1 a



2 a



1 b



2 b



You can either take the small wheels with you for a bike trip or leave them at home. If you take them, they work as an kickstand.





### 3. DIFFERENT POSITIONS OF THE SEAT



The lower “comfortable” position - the seat hangs on the lower tube.



The higher “sitting” position - the seat hangs on the higher tube.



#### 4. THE SIDE CUSHION – HOW TO INSTALL IT

1.



2.



#### 5. THE ROOF – HOW TO ATTACH IT TO THE CAB

1.



Roll the roof carefully in to the scroll.  
Use the two straps on the each side of  
the scroll to attach it to the cab.

2.





## 10. THE KICKSTAND




This is how it looks like when the kickstand is installed. Included in the equipment of the model TAHOE (the pure trailer), by the other two models is the kickstand an option (accessory).



## 12. THE FENDER – HOW TO INSTALL IT



Start the installation from the bottom side of the handlebar. Just click the buttons.

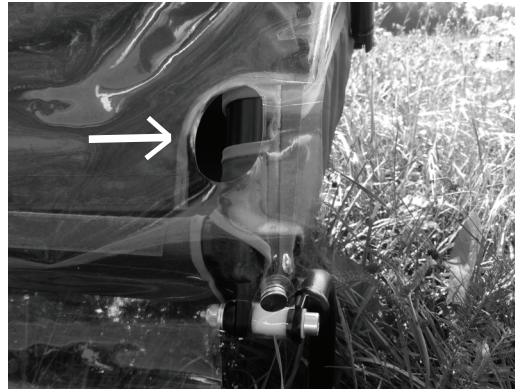

This is where you should click up/forward the axle with the two small wheels to the frame.

