

USER GUIDE Suspension KF Outback (Spring and Oil)




Take the absorber and fasten it onto the frame with the adjust ring located down to the swingarm. To the top belongs the screw, down at the swingarm use the quick release skewer.



Tight them both really good, especially the quick release skewer. There should not be a play so that the absorber would move (jump up and down and vice-versa). It must hold one position.



The adjust ring has 4 positions, starting with position number 1. This position is meant for weights from 1 up to 10 kg (for small children, most of whom need the infant sling for toddlers).

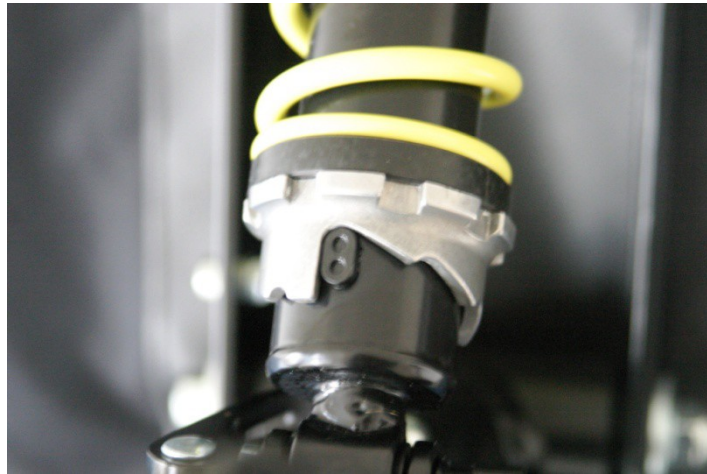

To move the adjust ring to the second position, just remove the big wheel, the manipulation will be easier then. The absorber stays fixed on the frame and on the swingarm. Take the adjust ring and simply move it to the left.



The second position is for the loads from 10 up to 20 kg. For loads from 20 up to 25 kg use the third position and for the loads heavier than 25 kg the fourth position. It shouldn't be difficult to move the ring from position 1 to 4 by hand, still, if you find it a bit tougher, simply use a pair of tongs. Set them onto the ring, hold firmly and pull.



Moving to the positions 3, 2 and 1 just by hand will be tougher (the spring preloading is on its maximum). Use therefore the pair of tongs, it's easier.

CARE : clean the absorber from time to time, control it regularly (just visually), especially after riding in the mud and rain. Use just the water to clean it, remove the mud and little sand stones.