


Assembly Of The Handlebar



Loose the clamp on the handlebar.

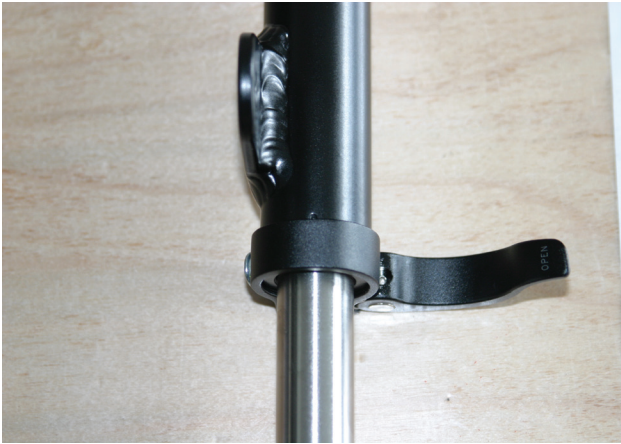

Unscrew the female screw on the clamp.



Unscrew and take out the screw in the clamp.



Take out the clamp and the plastic casing.



Take out the black tube, the clamp and the casing. Then take out the bull horn and exchange it for the new one.