



USER GUIDE how to install the infant sling



You can either remove the seat, or leave it in the trailer and install the infant sling over it. Taking out the seat is not difficult, just unfasten the Velcro fasteners and remove it. If you decide to keep the seat in the trailer, just remove the headrest (another Velcro) and loosen the safety belts.



On the top, the belt is normally tightened over the upper tube of the frame. Remove it and tighten it over the lower tube as you see on the picture. Install the baby sling on the upper tube of the frame. Use the buttons to fasten it.

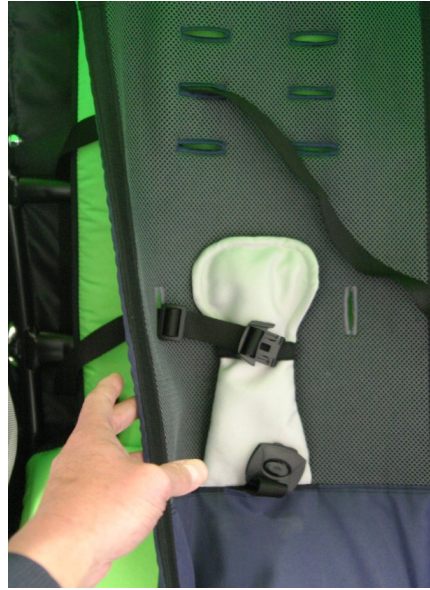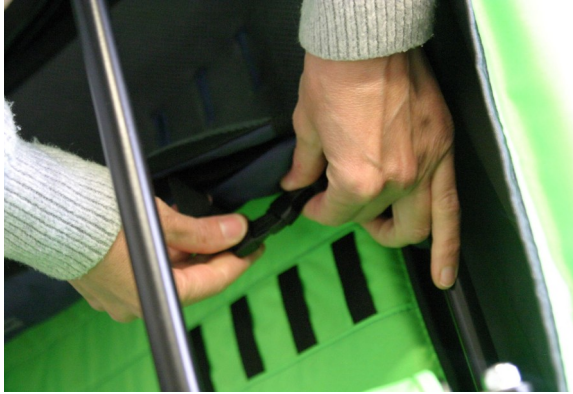

Secure the top of the infant sling with the clamps which you find on the back of the sling. Take the belts and install them on the infant sling.



So should it look like. You'll later adjust the belts to the proportions of your kid.



Now loosen the Velcro fasteners on the lower parts of the frame (right and left). Use the belts on the lower parts of the infant sling and fasten them with the clamps to the frame. Tighten them firmly.



Cover the frame again (fasten the Velcro). Then you're finally ready for ride :-)